

Industrial Opal/Nature/Black

Industrial Ceiling Panels provide excellent noise absorption and can be used in their own right to create a ceiling or be placed behind other surfaces.




Industrial Opal/Nature/Black

Industrial ceilings provide excellent noise absorption and can be used in their own right to create a ceiling or be placed behind other surfaces.

Industrial ceilings are low in weight, ensuring quick and easy installation. Industrial tiles have a pre-finished surface,

coated edges, sealed backs and provide a high level of sound absorption. Available in white, nature or black finish.

ASSORTMENT

Edge detail	Module size (mm)	Weight (kg/m ²)	MS* easy access (mm)	Installation system
Industrial Opal				
	1200 x 600 x 50	4.0	160	System SY24
	1200 x 1200 x 50	4.0	200	
	1200 x 600 x 100	8.0	200	
Industrial Nature				
	1200 x 600 x 50	4.0	160	System SY24
	1200 x 1200 x 50	4.0	200	
	1200 x 600 x 100	8.0	200	
Industrial Black				
	1200 x 600 x 50	4.0	160	System SY24
	1200 x 1200 x 50	4.0	200	

* MS - Minimum Suspension



Industrial Opal



Industrial Nature



Industrial Black




Industrial Opal/Nature/Black



SOUND ABSORPTION

Sound absorption has been measured in accordance with ISO 354. Sound absorption data α_p , α_w and absorption class are calculated in accordance with ISO 11654. Noise Reduction Coefficient (NRC) is calculated in accordance with ASTM C423.

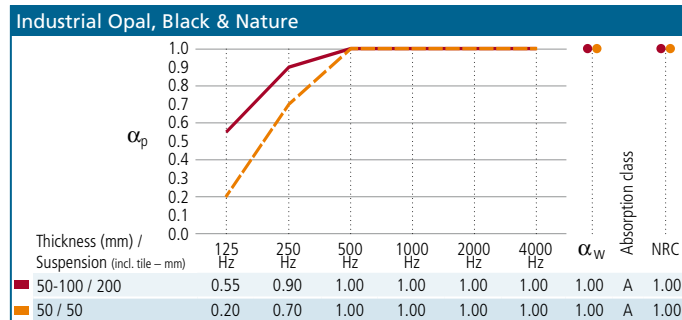

FIRE PERFORMANCE

General: Industrial Ceiling Panels have a core of stone wool. Stone wool is non-combustible with a melting point of more than 1000°C.

Reaction to fire: Class A1 in accordance with EN 13501-1.

Fire protection: The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes.



HUMIDITY RESISTANCE AND DIMENSIONAL STABILITY (FLEXURAL TENSILE STRENGTH)

Rockfon ceiling tiles are dimensionally stable even at humidity levels of up to 100% RH and can be installed at all temperatures ranging from 0°C to 40°C. No acclimatisation is necessary.

Industrial Ceiling Panels are predominantly classified as Class 1/C/0N in accordance with EN 13964. However, certain module sizes (width above 700mm) are Class 2/C/0N.



LIGHT REFLECTION

Opal 64% diffuse light reflection in accordance with ISO 7724-2.



THERMAL CONDUCTIVITY

Industrial with a thickness equal to and exceeding 30mm has been measured in accordance with EN 12667 and has obtained the following value: $\lambda_D = 37$ mW/mK.

Thermal resistance: $R = 1.35$ m² K/W.



HYGIENE

Stone wool has no nutritional value and therefore it provides no sustenance to harmful micro-organisms.



CLEANING

The surface can be vacuum cleaned with a soft brush attachment.



ENVIRONMENT

A representative selection of Rockfon products have been awarded the Danish Indoor Climate Label and the Finnish Indoor Climate Label (M1).

Industrial is recyclable.

ACTIVATE YOUR CEILING

Rockfon® develop intelligent ceiling solutions which actively address a number of important issues in modern buildings and renovation projects.

Rockfon products are known for their design, aesthetics and ease of installation; coupled with the key performance features of superior fire resistance and acoustics.

This ensures that our ceiling solutions are among the highest performing, most cost effective and time efficient in today's interiors market.

The comprehensive ceiling solution portfolio from Rockfon ensures that our customers are able to actively add value to the construction process, by ultimately creating superior interior environments.

That is why we say "ACTIVATE YOUR CEILING".

All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on licence from NCS Colour AB, Stockholm 2010

Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Rockfon

(Rockwool A/S)
Hovedgaden 501
DK-2640 Hedehusene
Denmark

Tlf: (+45) 46 56 85 45
Fax: (+45) 46 56 40 30
www.rockfon.com
export@rockfon.com

Local Rockfon dealer