

Sonar[®] range

Sonar

Sonar Activity

A comprehensive range of aesthetically pleasing durable tiles with a micro-textured surface, strong edges and excellent acoustics, available in a wide variety of sizes and edges which meet the highest fire safety and sound absorption regulations.

activeceilings[®]

ROCKWOOL
Rockfon[®]
ACTIVATE YOUR CEILING

A comprehensive range of aesthetically pleasing durable tiles with a micro-textured surface, strong edges and excellent acoustics, available in a wide variety of sizes and edges which meet the highest fire safety and sound absorption regulations.


The Rockfon Sonar range provides extensive design freedom. It is suited for a multitude of spaces such as offices, retail environments, classrooms and cleanrooms. Rockfon Sonar offers the unique combination of the highest fire safety, Fire Class A1, and acoustic comfort, Class A sound absorption, providing peace of mind as well as peace and quiet.

Sonar is available in many different module sizes and edge details, offering a large number of design options and installation solutions, altogether providing more flexibility and much more scope for obtaining the ultimate from suspended ceiling solutions.






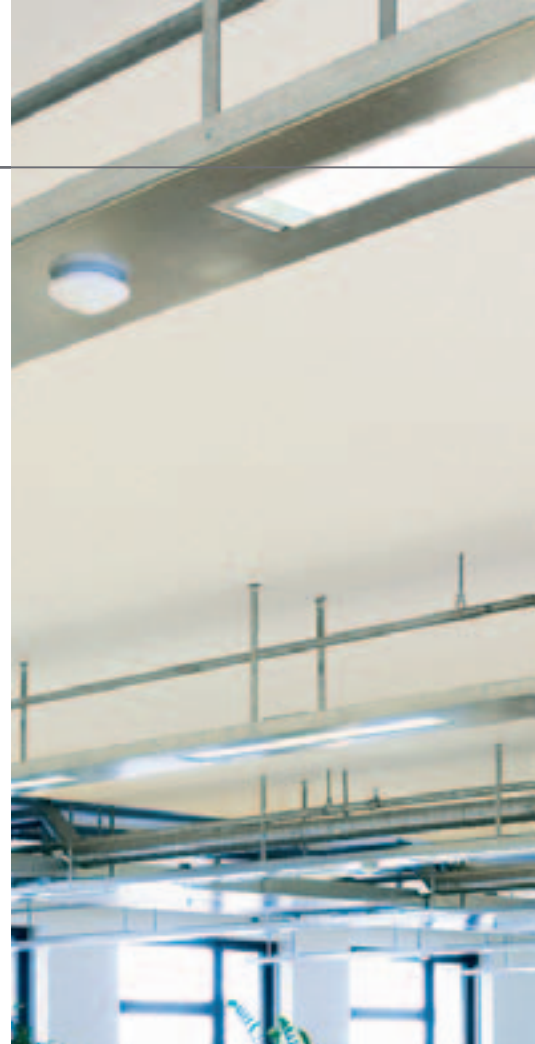


Sonar tiles are produced using a patented technology, ensuring razor-sharp looking

edges that are not only elegant but strong and flexible for superior durability. The top lacquer used on the surface provides enhanced cleaning properties and resistance to scratches and marks.

Sonar is ideally suited for use in communal corridors, lobby areas and stairwells where it can be used to great effect to allow compliance with the sound absorption requirements. The use of the B and C edge options ensure that sound absorption is obtained with the absolute minimum reduction in ceiling height which can be as low as 20mm – giving you all of the sound absorption you need without holes, slots or fissures.



Sonar

Edge detail	Module size (mm)	Weight (kg/m ²)	MS* easy access (mm)	Installation system
A15 	600 x 600 x 20	3.5	100	System SY15
A24 	600 x 600 x 20	3.5	100	System SY24XL
	1200 x 600 x 20	3.5	100	System SY24
	1800 x 600 x 20	3.5	100	
	2400 x 600 x 25	4.2	100	
B 	600 x 600 x 20	3.5	20 / not demountable	System B
	1200 x 600 x 20	3.5	20 / not demountable	
C 	600 x 600 x 20	3.5	20 / not demountable	System C
	1200 x 600 x 20	3.5	20 / not demountable	
D 	600 x 600 x 20	3.5	60	System D
	1200 x 600 x 20	3.5	60	System D-XL
	1800 x 600 x 20	3.5	60	
	1200 x 300 x 20	3.5	60	
	900 x 900 x 25	4.2	67	
	2400 x 600 x 25	4.2	67	
E15 	600 x 600 x 20	3.5	100	System SY15
	1200 x 600 x 20	3.5	100	
E24 	600 x 600 x 20	3.5	100	System SY24XL
	1200 x 600 x 20	3.5	100	System SY24
	1800 x 600 x 20	3.5	100	
	2100 x 600 x 25	4.2	150	System SY24
	2400 x 600 x 25	4.2	150	
	900 x 900 x 25	4.2	150	
	1200 x 1200 x 25	4.2	150	
M 	600 x 600 x 20	3.5	60	System M
	1200 x 600 x 20	3.5	60	



* MS - Minimum Suspension





SOUND ABSORPTION

Sound absorption has been measured in accordance with ISO 354. Sound absorption data α_p , α_w and absorption class are calculated in accordance with ISO 11654. Noise Reduction Coefficient (NRC) is calculated in accordance with ASTM C423.

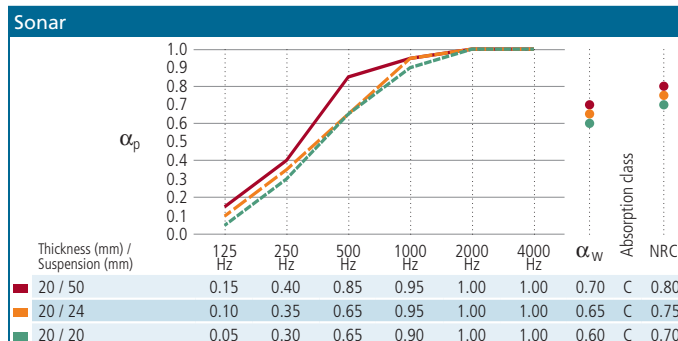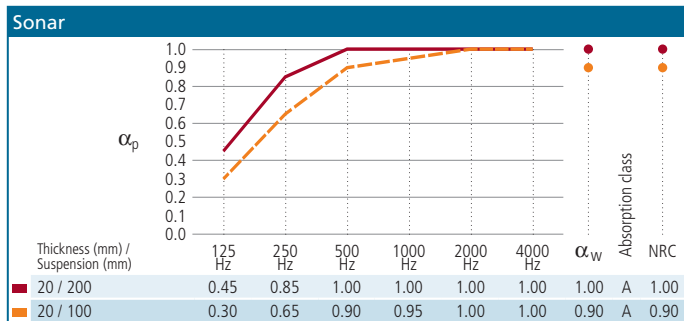

FIRE PERFORMANCE

General: Rockfon ceiling tiles have a core of stone wool. Stone wool is non-combustible with a melting point of more than 1000°C.

Reaction to fire: Class A1 in accordance with EN 13501-1.

Fire protection: The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes.



HUMIDITY RESISTANCE AND DIMENSIONAL STABILITY (FLEXURAL TENSILE STRENGTH)

Rockfon ceiling tiles are dimensionally stable even at humidity levels of up to 100% RH and can be installed at all temperatures ranging from 0°C to 40°C.

No acclimatisation is necessary.

Sonar is predominantly classified as Class 1/C/0N in accordance with EN 13964. However, certain module sizes (width above 700mm) are Class 2/C/0N.



LIGHT REFLECTION

White, 85% diffuse light reflection in accordance with ISO 7724-2.



HYGIENE

Stone wool has no nutritional value and therefore it provides no sustenance to harmful micro-organisms.



CLEAN ROOM CLASSIFICATION

Sonar is classified as Class 5 in accordance with ISO 14644-1.



CLEANING

The surface can be vacuum cleaned with a soft brush attachment.

The surface can also be cleaned once a week using a sponge or cloth and warm water (max. 40°C) with a slightly alkaline detergent (max. pH 10) without alcohol, ammonia or chlorine. Cleaning with a damp sponge or cloth may render the surface slightly shinier and we therefore recommend cleaning the whole surface evenly for best results.



AFTERCARE

The tiles can be treated with Rockfon finishing paint, PVA water-based special paint with safety code 00-1, applied in the correct amount with an airless spray with good capacity. The surface of the tiles must be clean and dry and the existing paint surface must be firmly adhered to the tile prior to refinishing.

Heavily discoloured tiles should be replaced.

The painting of acoustic tiles reduces the sound absorption by approximately 10%.



ENVIRONMENT

A representative selection of Rockfon products have been awarded the Danish Indoor Climate Label and the Finnish Indoor Climate Label (M1).

Sonar is recyclable.






Sonar[®] Activity

Sonar Activity is designed for classrooms and open plan offices where speech intelligibility is crucial and noise and activity levels are very high.

The 40mm thickness and the high degree of sound absorption provided by Sonar Activity makes direct installation onto soffits possible –

maximising ceiling height whilst still achieving Class A sound absorption.

Sonar Activity



Edge detail	Module size (mm)	Weight (kg/m ²)	MS* easy access (mm)	Installation system
 A24	600 x 600 x 40	7.0	200	System SY24
	1200 x 600 x 40	7.0	200	
 B	600 x 600 x 40	7.0	40 / not demountable	System B
 C	600 x 600 x 40	7.0	44 / not demountable	System C
 D	600 x 600 x 40	7.0	80	System D
 E24	600 x 600 x 40	7.0	200	System SY24
	1200 x 600 x 40	7.0	200	

* MS - Minimum Suspension



SOUND ABSORPTION

Sound absorption has been measured in accordance with ISO 354. Sound absorption data α_p , α_w and absorption class are calculated in accordance with ISO 11654. Noise Reduction Coefficient (NRC) is calculated in accordance with ASTM C423.

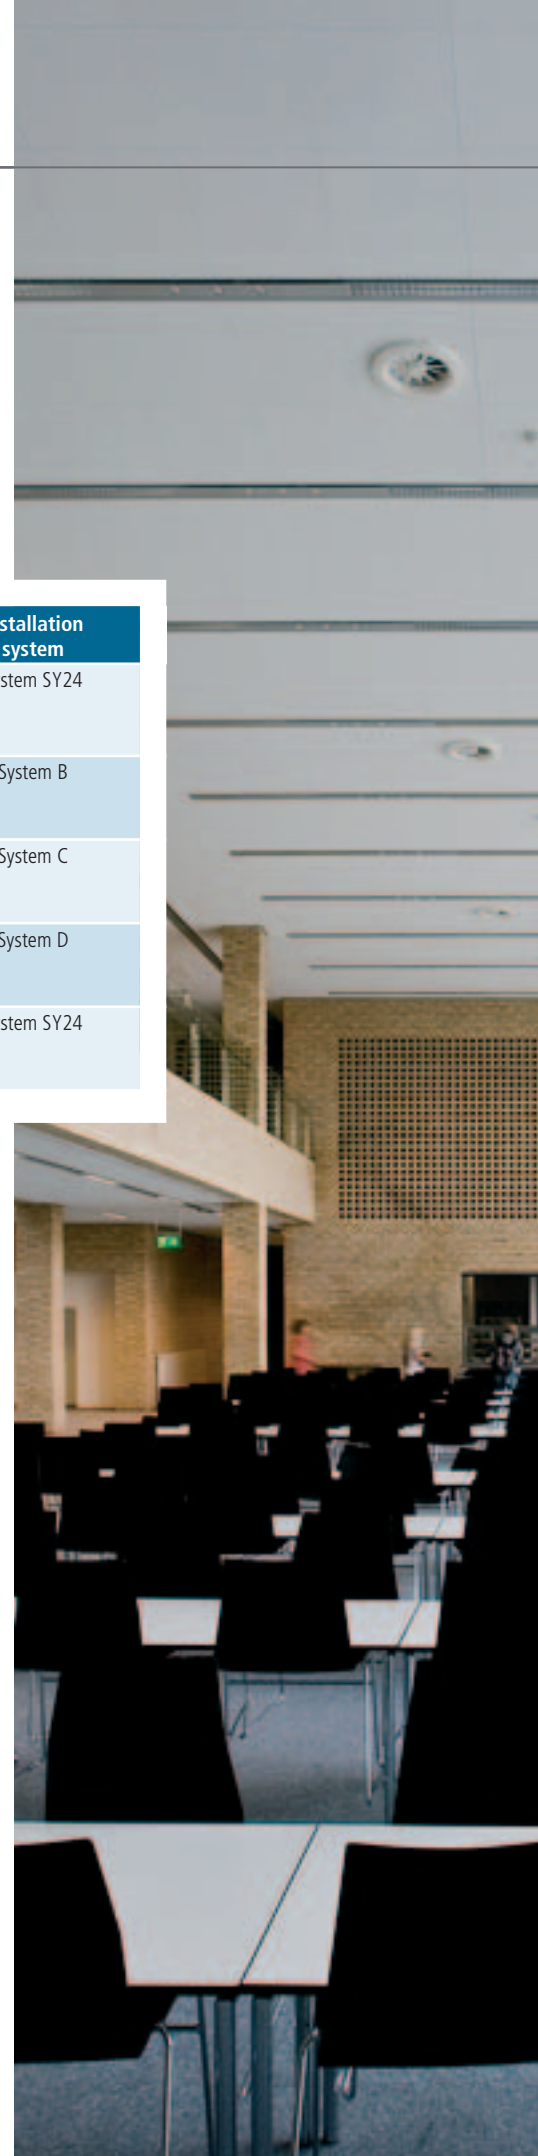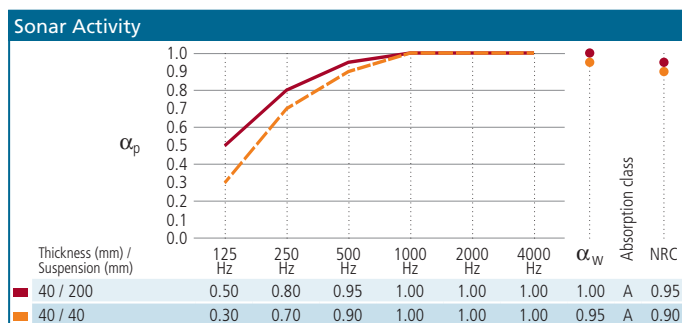



FIRE PERFORMANCE

General: Rockfon ceiling tiles have a core of stone wool. Stone wool is non-combustible with a melting point of more than 1000°C.

Reaction to fire: Class A1 in accordance with EN 13501-1.

Fire protection: The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes.



HUMIDITY RESISTANCE AND DIMENSIONAL STABILITY (FLEXURAL TENSILE STRENGTH)

Rockfon ceiling tiles are dimensionally stable even at humidity levels of up to 100% RH and can be installed at all temperatures ranging from 0°C to 40°C.

No acclimatisation is necessary.

Sonar Activity is predominantly classified as Class 1/C/0N in accordance with EN 13964. However, certain module sizes (width above 700mm) are Class 2/C/0N.



LIGHT REFLECTION

White, 85% diffuse light reflection in accordance with ISO 7724-2.



THERMAL CONDUCTIVITY

Sonar Activity with a thickness equal to and exceeding 30 mm has been measured in accordance with EN 12667 and has obtained the following value: $\lambda_D = 40$ mW/mK.

Thermal resistance: $R = 1.00$ m² K/W.



HYGIENE

Stone wool has no nutritional value and therefore it provides no sustenance to harmful micro-organisms.



CLEAN ROOM CLASSIFICATION

Sonar Activity is classified as Class 5 in accordance with ISO 14644-1.



CLEANING

The surface can be vacuum cleaned with a soft brush attachment.

The surface can also be cleaned once a week using a sponge or cloth and warm water (max. 40°C) with a slightly alkaline detergent (max. pH 10) without alcohol, ammonia or chlorine. Cleaning with a damp sponge or cloth may render the surface slightly shinier and we therefore recommend cleaning the whole surface evenly for best results.



AFTERCARE

The tiles can be treated with Rockfon finishing paint, PVA water-based special paint with safety code 00-1, applied in the correct amount with an airless spray with good capacity. The surface of the tiles must be clean and dry and the existing paint surface must be firmly adhered to the tile prior to refinishing. Heavily discoloured tiles should be replaced.

The painting of acoustic tiles reduces the sound absorption by approximately 10%.



ENVIRONMENT

A representative selection of Rockfon products have been awarded the Danish Indoor Climate Label and the Finnish Indoor Climate Label (M1).

Sonar Activity is recyclable.

ACTIVATE YOUR CEILING

Rockfon® develop intelligent ceiling solutions which actively address a number of important issues in modern buildings and renovation projects.

Rockfon products are known for their design, aesthetics and ease of installation; coupled with the key performance features of superior fire resistance and acoustics.

This ensures that our ceiling solutions are among the highest performing, most cost effective and time efficient in today's interiors market.

The comprehensive ceiling solution portfolio from Rockfon ensures that our customers are able to actively add value to the construction process, by ultimately creating superior interior environments.

That is why we say "ACTIVATE YOUR CEILING".

Rockfon
(Rockwool A/S)
Hovedgaden 501
2640 Hedehusene

Tlf: 46 56 85 45
Fax: 46 56 40 30
www.rockfon.com
export@rockfon.com

Local Rockfon dealer