

Pacific®

*The standard choice in smooth surface,
value for money tiles.*

activeceilings®

ROCKWOOL
Rockfon®
ACTIVATE YOUR CEILING

Pacific®




The standard choice in smooth surface, value for money tiles.

Pacific is ideally suited to a simple, basic ceiling when standard sound absorption is required.

Less than half the weight of traditional ceiling tiles, Pacific is easy to carry, cut and install.

It is available with E-edges for a semi-concealed look and A-edges for an exposed grid application.

Pacific

Edge detail	Module size (mm)	Weight (kg/m ²)	MS* easy access (mm)	Installation system
 A15	600 x 600 x 15	1.9	100	System SY15
 A24	600 x 600 x 15	1.9	100	System SY24XL
	1200 x 600 x 15	1.9	100	System SY24
 E15	600 x 600 x 15	2.4	100	System SY15
 E24	600 x 600 x 15	2.4	100	System SY24XL
	1200 x 600 x 15	2.4	100	System SY24


* MS - Minimum Suspension





SOUND ABSORPTION

Sound absorption has been measured in accordance with ISO 354. Sound absorption data α_p , α_w and absorption class are calculated in accordance with ISO 11654. Noise Reduction Coefficient (NRC) is calculated in accordance with ASTM C423.

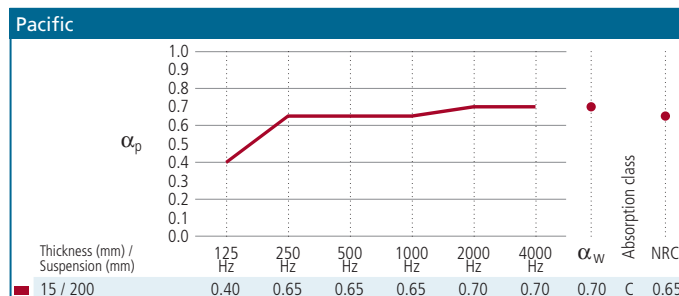

FIRE PERFORMANCE

General: Rockfon ceiling tiles have a core of stone wool. Stone wool is non-combustible with a melting point of more than 1000°C.

Reaction to fire: Class A1 in accordance with EN 13501-1.

Fire protection: The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes.



HUMIDITY RESISTANCE AND DIMENSIONAL STABILITY (FLEXURAL TENSILE STRENGTH)

Rockfon ceiling tiles are dimensionally stable even at humidity levels of up to 100% RH and can be installed at all temperatures ranging from 0°C to 40°C.

No acclimatisation is necessary.

Pacific is classified as Class 1/C/ON in accordance with EN 13964. However, certain module sizes (width above 700 mm) are class [2/C/ON]



LIGHT REFLECTION

White, 85% diffuse light reflection in accordance with ISO 7724-2.



HYGIENE

Stone wool has no nutritional value and therefore it provides no sustenance to harmful micro-organisms.



CLEANING

The surface can be vacuum cleaned with a soft brush attachment.



AFTERCARE

The tiles can be treated with Rockfon finishing paint, PVA water-based special paint with safety code 00-1, applied in the correct amount with an airless spray with good capacity. The surface of the tiles must be clean and dry and the existing paint surface must be firmly adhered to the tile prior to refinishing.

Heavily discoloured tiles should be replaced. The painting of acoustic tiles reduces the sound absorption by approximately 10%.



ENVIRONMENT

A representative selection of Rockfon products have been awarded the Danish Indoor Climate Label and the Finnish Indoor Climate Label (M1).

Pacific is recyclable.

ACTIVATE YOUR CEILING

Rockfon® develop intelligent ceiling solutions which actively address a number of important issues in modern buildings and renovation projects.

Rockfon products are known for their design, aesthetics and ease of installation; coupled with the key performance features of superior fire resistance and acoustics.

This ensures that our ceiling solutions are among the highest performing, most cost effective and time efficient in today's interiors market.

The comprehensive ceiling solution portfolio from Rockfon ensures that our customers are able to actively add value to the construction process, by ultimately creating superior interior environments.

That is why we say "ACTIVATE YOUR CEILING".

Rockfon
(Rockwool A/S)
Hovedgaden 501
2640 Hedehusene

Tlf: 46 56 85 45
Fax: 46 56 40 30
www.rockfon.com
export@rockfon.com

Local Rockfon dealer